


ARF-Q LED




Square recessed LED luminaire for the 78 cut-out

- Application:** „cool light“ to illuminate delicate products
- Connection:** LED-transformer DC 350mA
- Lamp:** extremely long-life 4 x 1W power-LED, ϕ life 60,000 hours
- Energy efficiency:** very good, ww: 80lm/W; cw: 90lm/W
- Colour rendering:** ww: good, Ra = 85; cw: satisfactory, Ra = 70
- Special features:** contemporary square shape; low power consumption; no UV rays; versatile accessories with spacer ring for an installation depth of only 12 mm and mounting ring for mounting with no cavity; Outer casing made of high-tech plastic (high-temperature resistant, dimensionally stable and non-brittle) guarantees safe support even after years of use.

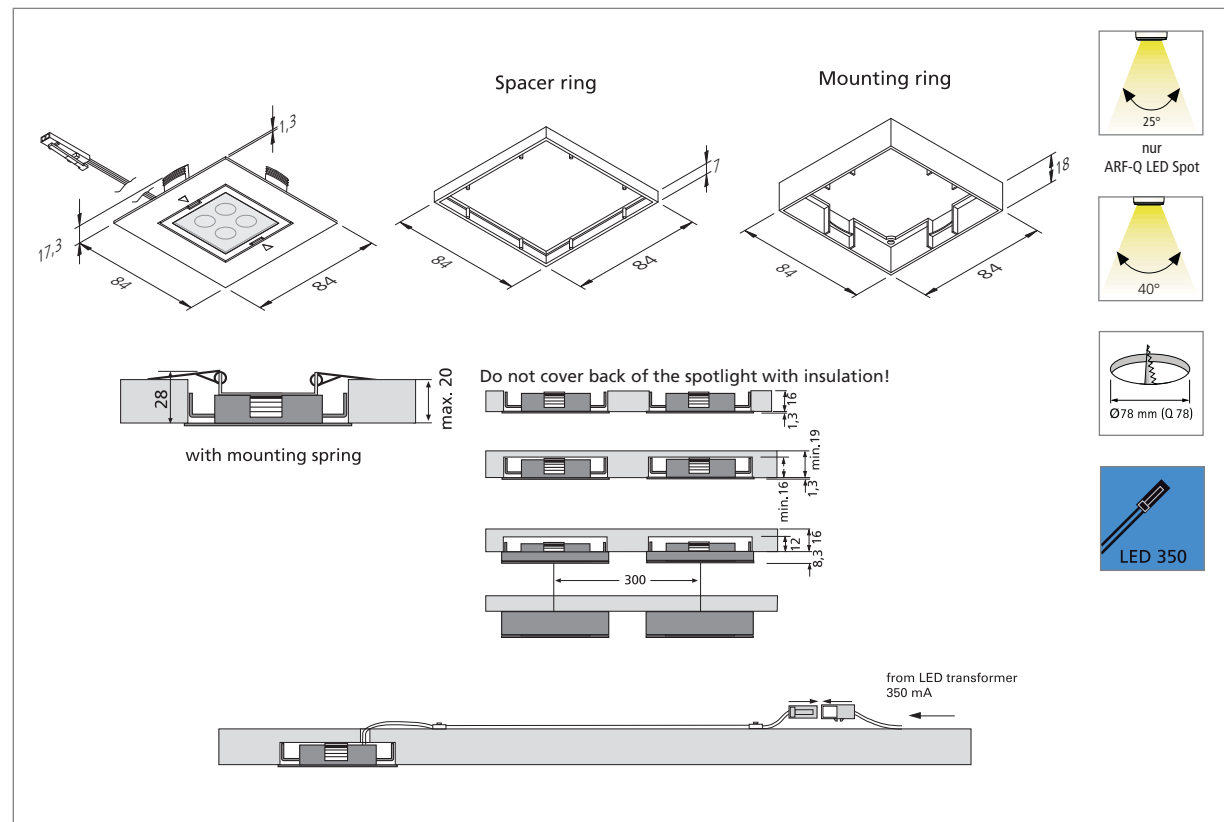

ARF-Q LED

LED
Halogen

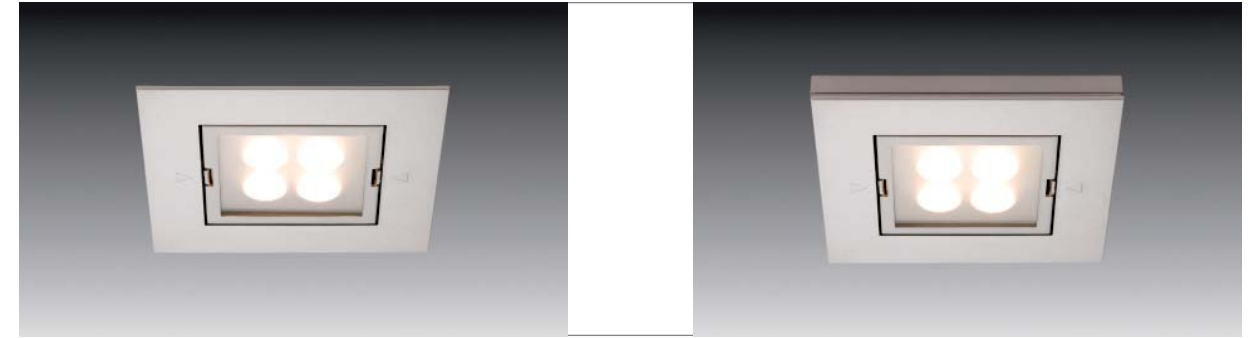

NEW

Article No.	Description	Illustration	Features	Approx. weight	
610 012 402 04	ARF-Q LED Spot 4x1W ww chrome		• light colour ww (warm white) approx. 3000K	95 g	
610 012 402 06	ARF-Q LED Spot 4x1W ww matt chrome		• supply cable 1.8m with LED 350 plug	95 g	
610 012 402 08	ARF-Q LED Spot 4x1W ww stainless steel		• incl. tempered glass cover	95 g	
610 012 401 04	ARF-Q LED Spot 4x1W cw chrome		• Spot with beam angle from 25°	95 g	
610 012 401 06	ARF-Q LED Spot 4x1W cw matt chrome		• light colour cw (cool white) approx. 4900K	95 g	
610 012 401 08	ARF-Q LED Spot 4x1W cw stainless steel		• supply cable 1.8m with LED 350 plug	95 g	
610 011 002 04	ARF-Q LED 4x1W ww chrome		• incl. tempered glass cover	95 g	
610 011 002 06	ARF-Q LED 4x1W ww matt chrome		• Spot with beam angle from 18°	95 g	
610 011 002 08	ARF-Q LED 4x1W ww stainless steel		• light colour ww (warm white) approx. 3000K	95 g	
610 011 001 04	ARF-Q LED 4x1W cw chrome		• supply cable 1.8m with LED 350 plug	95 g	
610 011 001 06	ARF-Q LED 4x1W cw matt chrome		• incl. satinised tempered glass cover	95 g	
610 011 001 08	ARF-Q LED 4x1W cw stainless steel		• light colour cw (cool white) approx. 4900K	95 g	
610 502 922 18	set of 2 ARF-Q LED 4x1W ww stainless steel			• incl. transformer LED 350/9W	365 g
610 502 921 18	set of 2 ARF-Q LED 4x1W cw stainless steel			• light colour ww (warm white) approx. 3000K	365 g
610 502 942 08	set of 4 ARF-Q LED 4x1W ww stainless steel			• supply cable 1,8m with LED 350 plug	600 g
610 502 941 08	set of 4 ARF-Q LED 4x1W cw stainless steel			• incl. transformer LED 350/2x9W	600 g
205 020 115 04	Spacer ring (K 199) chrome		• light colour ww (warm white) approx. 3000K	6 g	
205 020 115 06	Spacer ring (K 199) matt chrome		• supply cable 1,8m with LED 350 plug	6 g	
205 020 115 08	Spacer ring (K 199) stainless steel		• reduces the installation depth to 12mm	6 g	
515 000 380 04	Mounting ring (K 200) chrome		• incl. screws	17 g	
515 000 380 06	Mounting ring (K 200) matt chrome			17 g	
515 000 380 08	Mounting ring (K 200) stainless steel			17 g	
615 000 301 01	Mounting spring ARF 68/78/Q		• for mounting in lightweight design ceilings	24 g	
215 250 610 01	LED 350 connecting cable 1m			12 g	
215 250 620 01	LED 350 connecting cable 2m			20 g	
615 003 009 03	Transformer LED 350/9W 3-way distributor with Euro plug		• for 1 – 2 ARF-Q LED (further information on page 124)	175 g	
615 003 009 23	Transformer LED 350/2x9W 2x3-way distributor with Euro plug		• for 2 – 4 ARF-Q LED (further information on page 125)	220 g	