


ARF-Q LED




Square recessed LED luminaire for the 78 cut-out

- Application:** „cool light“ to illuminate delicate products
- Connection:** LED-transformer DC 350mA
- Lamp:** extremely long-life 4 x 1W power-LED, ϕ life 60,000 hours
- Energy efficiency:** very good, ww: 80lm/W; cw: 90lm/W
- Colour rendering:** ww: good, Ra = 85; cw: satisfactory, Ra = 70
- Special features:** contemporary square shape; low power consumption; no UV rays; versatile accessories with spacer ring for an installation depth of only 12 mm and mounting ring for mounting with no cavity; Outer casing made of high-tech plastic (high-temperature resistant, dimensionally stable and non-brittle) guarantees safe support even after years of use.

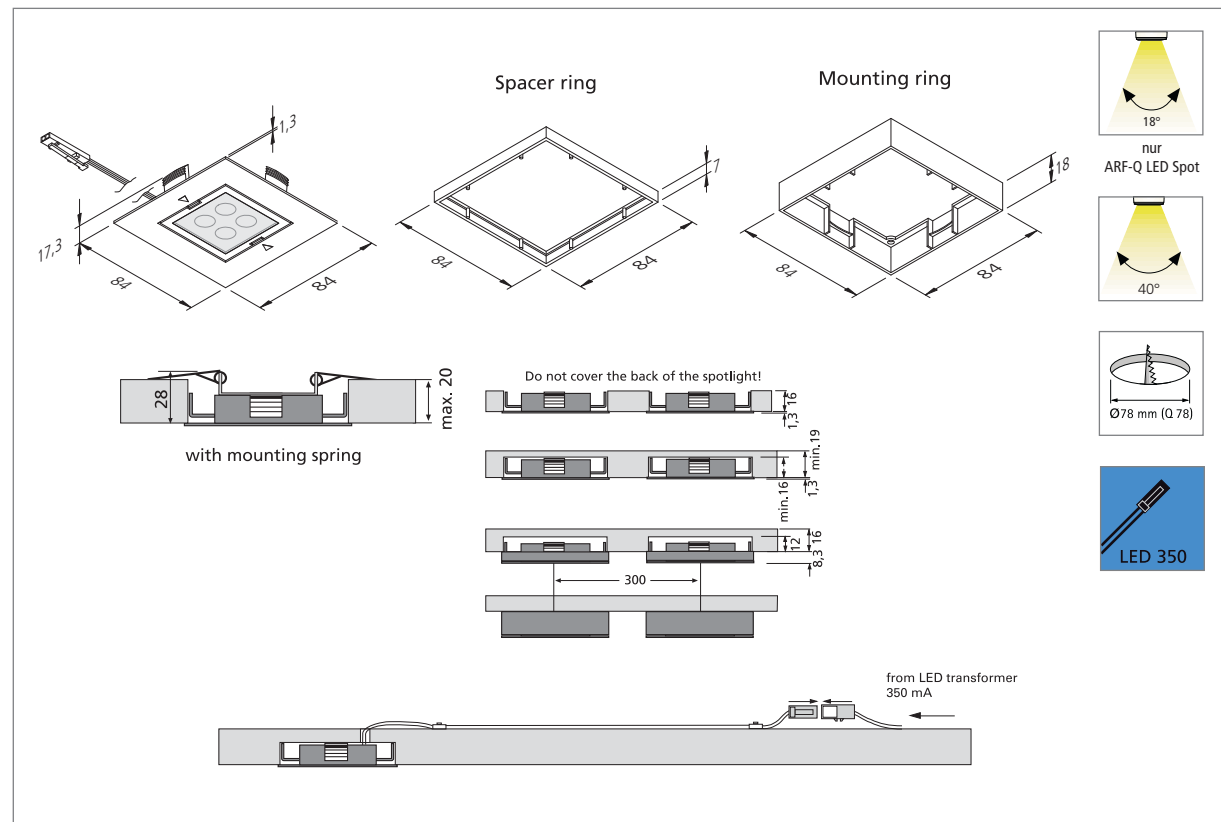

ARF-Q LED

LED
Halogen

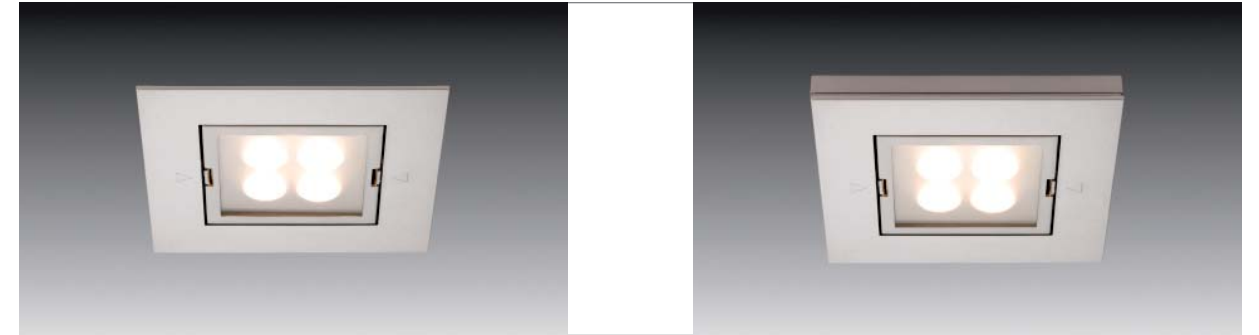

NEW

Article No.	Description	Illustration	Features	Approx. weight	
610 012 402 04	ARF-Q LED Spot 4x1W ww chrome		<ul style="list-style-type: none"> light colour ww (warm white) supply cable 1.8m with LED 350 plug incl. tempered glass cover Spot with beam angle from 18° 	95 g	
610 012 402 06	ARF-Q LED Spot 4x1W ww matt chrome		95 g		
610 012 402 08	ARF-Q LED Spot 4x1W ww stainless steel		95 g		
610 012 401 04	ARF-Q LED Spot 4x1W cw chrome		<ul style="list-style-type: none"> light colour cw (cool white) supply cable 1.8m with LED 350 plug incl. tempered glass cover Spot with beam angle from 18° 	95 g	
610 012 401 06	ARF-Q LED Spot 4x1W cw matt chrome		95 g		
610 012 401 08	ARF-Q LED Spot 4x1W cw stainless steel		95 g		
610 011 202 04	ARF-Q LED 4x1W ww chrome			<ul style="list-style-type: none"> light colour ww (warm white) supply cable 1.8m with LED 350 plug incl. satinised tempered glass cover 	95 g
610 011 202 06	ARF-Q LED 4x1W ww matt chrome			95 g	
610 011 202 08	ARF-Q LED 4x1W ww stainless steel	95 g			
610 011 201 04	ARF-Q LED 4x1W cw chrome	<ul style="list-style-type: none"> light colour cw (cool white) supply cable 1.8m with LED 350 plug incl. satinised tempered glass cover 		95 g	
610 011 201 06	ARF-Q LED 4x1W cw matt chrome	95 g			
610 011 201 08	ARF-Q LED 4x1W cw stainless steel	95 g			
610 502 922 18	set of 2 ARF-Q LED 4x1W ww stainless steel			<ul style="list-style-type: none"> incl. transformer LED 350/9W colour appearance ww (warm white) supply cable 1,8m with LED 350 plug 	365 g
610 502 921 18	set of 2 ARF-Q LED 4x1W cw stainless steel			<ul style="list-style-type: none"> incl. transformer LED 350/9W colour appearance cw (cool white) supply cable 1,8m with LED 350 plug 	365 g
610 502 942 08	set of 4 ARF-Q LED 4x1W ww stainless steel		<ul style="list-style-type: none"> incl. transformer LED 350/2x9W colour appearance ww (warm white) supply cable 1,8m with LED 350 plug 	600 g	
610 502 941 08	set of 4 ARF-Q LED 4x1W cw stainless steel		<ul style="list-style-type: none"> incl. transformer LED 350/2x9W colour appearance cw (cool white) supply cable 1,8m with LED 350 plug 	600 g	
205 020 115 04	Spacer ring (K 199) chrome		<ul style="list-style-type: none"> reduces the installation depth to 12mm 	6 g	
205 020 115 06	Spacer ring (K 199) matt chrome		6 g		
205 020 115 08	Spacer ring (K 199) stainless steel		6 g		
515 000 380 04	Mounting ring (K 200) chrome		<ul style="list-style-type: none"> incl. screws 	17 g	
515 000 380 06	Mounting ring (K 200) matt chrome		17 g		
515 000 380 08	Mounting ring (K 200) stainless steel		17 g		
615 000 301 01	Mounting spring ARF 68/78/Q		<ul style="list-style-type: none"> for mounting in lightweight design ceilings 	24 g	
215 250 610 01	LED 350 connecting cable 1m			12 g	
215 250 620 01	LED 350 connecting cable 2m		20 g		
615 003 009 03	Transformer LED 350/9W 3-way distributor with Euro plug		<ul style="list-style-type: none"> for 1 – 2 ARF-Q LED (further information on page 124) 	175 g	
615 003 009 23	Transformer LED 350/2x9W 2x3-way distributor with Euro plug		<ul style="list-style-type: none"> for 2 – 4 ARF-Q LED (further information on page 125) 	220 g	