




Linear Luminaire with Aluminium Casing

- Application:** quality linear luminaire for visible mounting in furniture, shelves, display cabinets, etc.
- Connection:** 220 – 240V / 50 – 60Hz
- Lamp:** extra long-life T5 (ø 16mm) high efficiency fluorescent lamp or T8 (ø 26mm) fluorescent lamp, ø life 20,000 hours / or high output fluorescent lamp, ø life 24,000 hours
- Energy efficiency:** good – very good, 63 – 94lm/W (15 – 58W)
- Colour rendering:** good, Ra = 80 – 89
- Special features:** flicker-free instant start, energy-saving due to an electronic ballast (not dimmable T8 30-58W: cold start electronic ballast optimised for switching on/off max. 3-4 times a day); dimmable version (1 – 10V) and with "intelligent" electronic ballast for different wattages (high efficiency or high output) also available; integrated contact slide allows later removal from the strip light; for horizontal and vertical mounting.

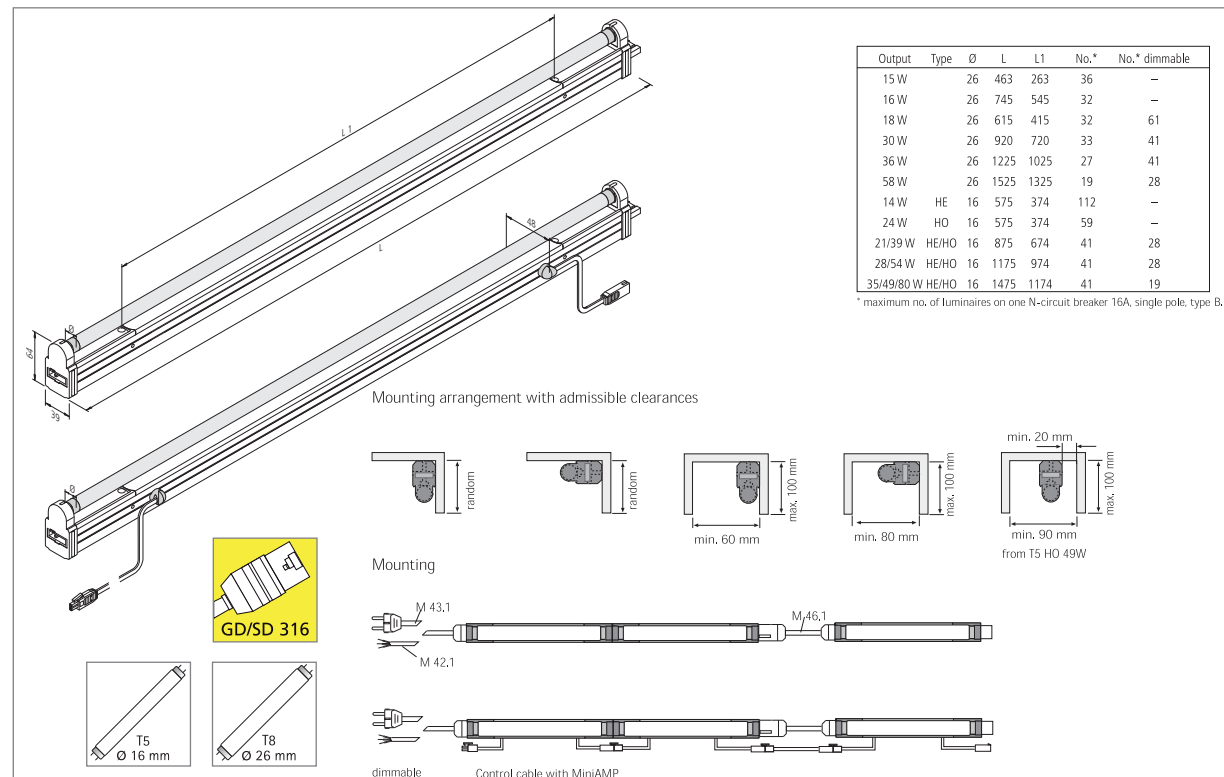

Article No.	Description	Illustration	Features	Approx. weight		
501 093 104 00	FD 7 470mm 15W (T8)		<ul style="list-style-type: none"> • please order T8 lamp (page 143) separately • incl. electronic ballast 	500 g		
501 093 106 00	FD 7 620mm 18W (T8)			600 g		
501 093 105 00	FD 7 750mm 16W (T8)			700 g		
501 093 107 00	FD 7 925mm 30W (T8)			950 g		
501 093 108 00	FD 7 1230mm 36W (T8)			1100 g		
501 093 109 00	FD 7 1530mm 58W (T8)	1500 g				
501 092 200 10	FD 7 620mm 18W (T8) dimmable		<ul style="list-style-type: none"> • please order T8 lamp (page 143) separately • incl. electronic ballast • dimmable (1–10V) • Dimmer (page 138) 	850 g		
501 092 201 10	FD 7 925mm 30W (T8) dimmable			1000 g		
501 092 202 10	FD 7 1230mm 36W (T8) dimmable			1150 g		
501 092 203 10	FD 7 1530mm 58W (T8) dimmable			1550 g		
501 092 211 01	FD 7 575mm 14W (T5)		<ul style="list-style-type: none"> • please order T5 lamp (from page 142) separately • incl. electronic ballast 	600 g		
501 093 322 00	FD 7 875mm 21W (T5)			950 g		
501 093 323 00	FD 7 1175mm 28W (T5)			1100 g		
501 093 324 00	FD 7 1475mm 35W (T5)			1500 g		
501 092 205 10	FD 7 875mm 21/39W (T5) dimmable		<ul style="list-style-type: none"> • please order T5 lamp (from page 142) separately • incl. electronic ballast • dimmable (1–10V) • Dimmer (page 138) 	950 g		
501 092 206 10	FD 7 1175mm 28/54W (T5) dimmable			1100 g		
501 092 204 10	FD 7 1475mm 35/49/80W (T5) dimmable			1500 g		
501 092 205 20	FD 7 875mm 21/39W (T5) dimmable			950 g		
501 092 206 20	FD 7 1175mm 28/54W (T5) dimmable	1100 g	<ul style="list-style-type: none"> • please order T5 lamp (from page 142) separately • incl. electronic ballast • dimmable (DALI) 	1100 g		
501 092 218 02	FD 7 1475mm 35/49/80W (T5) dimmable	1500 g				
215 100 105 01	M42.1/ 500 mains cable 0.5 m			<ul style="list-style-type: none"> • with ferrules 	70 g	
215 100 102 01	M42.1/1000 mains cable 1m				120 g	
215 100 103 01	M42.1/1500 mains cable 1.5m		170 g			
215 100 101 01	M42.1/2000 mains cable 2m		220 g			
215 100 104 01	M42.1/3000 mains cable 3m		320 g			
215 100 204 01	M43.1/1000 mains cable 1m		<ul style="list-style-type: none"> • with shockproof right angle plug D/F/B 		170 g	
215 100 203 01	M43.1/1500 mains cable 1.5m				220 g	
215 100 201 01	M43.1/2000 mains cable 2m				270 g	
215 100 202 01	M43.1/3000 mains cable 3m		370 g			
215 100 401 01	M46.1/ 200 connecting cable 0.2m		<ul style="list-style-type: none"> • mountable 		50 g	
215 100 404 01	M46.1/ 300 connecting cable 0.3m	60 g				
215 100 402 01	M46.1/ 500 connecting cable 0.5m	80 g				
215 100 403 01	M46.1/1000 connecting cable 1m	130 g				
215 100 405 01	M46.1/1500 connecting cable 1.5m	180 g				
215 100 406 01	M46.1/2000 connecting cable 2m	230 g				
215 100 407 01	M46.1/3000 connecting cable 3m	320 g				
502 004 000 04	G316 M socket	25 g				
502 005 000 04	S316 M plug	25 g				

further information on page 132