



Triangular Fluorescent Under-Cabinet Luminaire in Stainless Steel

- Application:** energy-saving worktop illumination for kitchens
- Connection:** 230 – 240V / 50 – 60Hz
- Lamp:** compact fluorescent lamp GX 53, ø life 6,000 hours
- Energy efficiency:** good, 37lm/W (6W)
- Colour rendering:** good, Ra = 80 – 89
- Special features:** casing of brushed stainless steel; easy assembly with only one screw; electronic contact switch EBS 4 as an optional extra.

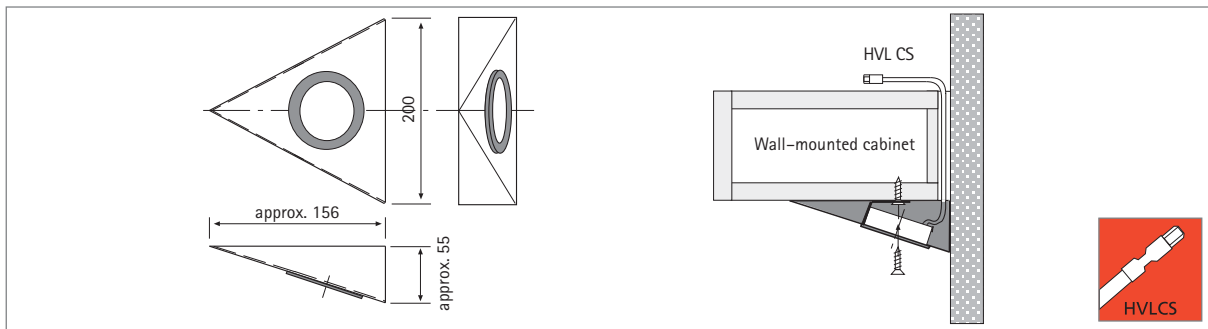

UL 3 – light element in a modern triangular shape. Ideal for installation under existing wall-mounted cabinets or in furniture corners. Energy-saving luminaire for evenly diffused light and low heat generation. The wide range of accessories includes a variety of supply cables and connecting cables.

Article No.	Description	Illustration	Features	Approx. weight
610 008 320 28	UL 3 stainless steel 6W ww (warm white)		<ul style="list-style-type: none"> • light colour ww (warm white 827) (Sylvania-Mycro Lynx) • supply cable 2m with HVLCS plug 	330 g
215 440 220 02	HVLCS 42/2000 mains cable 2m		<ul style="list-style-type: none"> • with ferrules (country-specific plugs page 137) • with Euro plug 	70 g
215 441 120 11	HVLCS V/2000 mains cable 2m + 6-way distributor			100 g
215 440 320 01	HVLCS 43/2000 mains cable 2m			90 g
215 441 120 01	HVLCS V/2000 mains cable 2m + 6-way distributor			120 g
215 440 605 01	HVLCS 46/ 500 connecting cable 0.5m			30 g
215 440 610 01	HVLCS 46/1000 connecting cable 1m			45 g
215 440 615 01	HVLCS 46/1500 connecting cable 1.5m			60 g
215 440 620 01	HVLCS 46/2000 connecting cable 2m			75 g
506 110 303 11	EBS-4 D with 1m ferrules + 1m ferrules			further information on page 135
506 110 301 01	EBS-4 D with 1m Euro plug + 0.3m Euro coupling	150 g		