


Dimmer 1-10V






LED Transformers
Halogen Transformers
Plug-in Systems
Switches/Dimmer/Sockets
Lamps

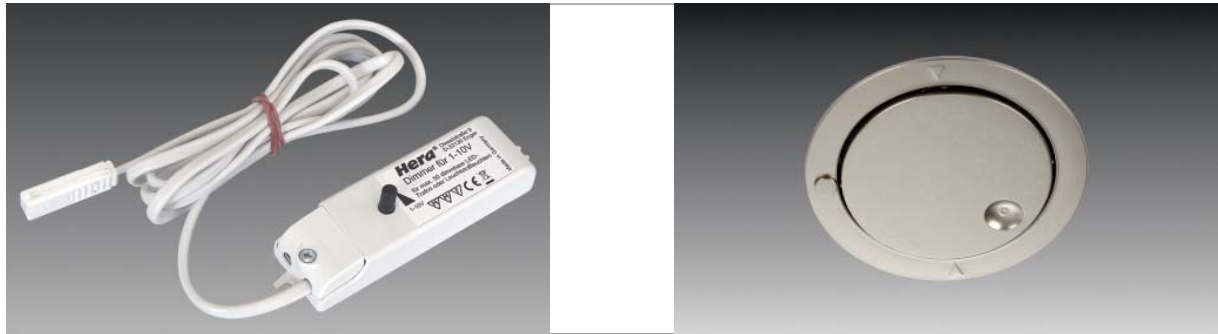

Dimmer Switch 1-10 V

- Connection: 1-10V to connect max. 50 dimmable linear luminaires or 50 dimmable LED transformers
- Use the Mini AMP distributor (see page 128) when you connect several transformers on a dimmer
- Dim range:
 - 0 – 100 % (LED 24V)
 - 1 – 100 % (FD 5, FD 7 und FD 8)
 - 10 – 100 % (LED 350mA and linear luminaires)

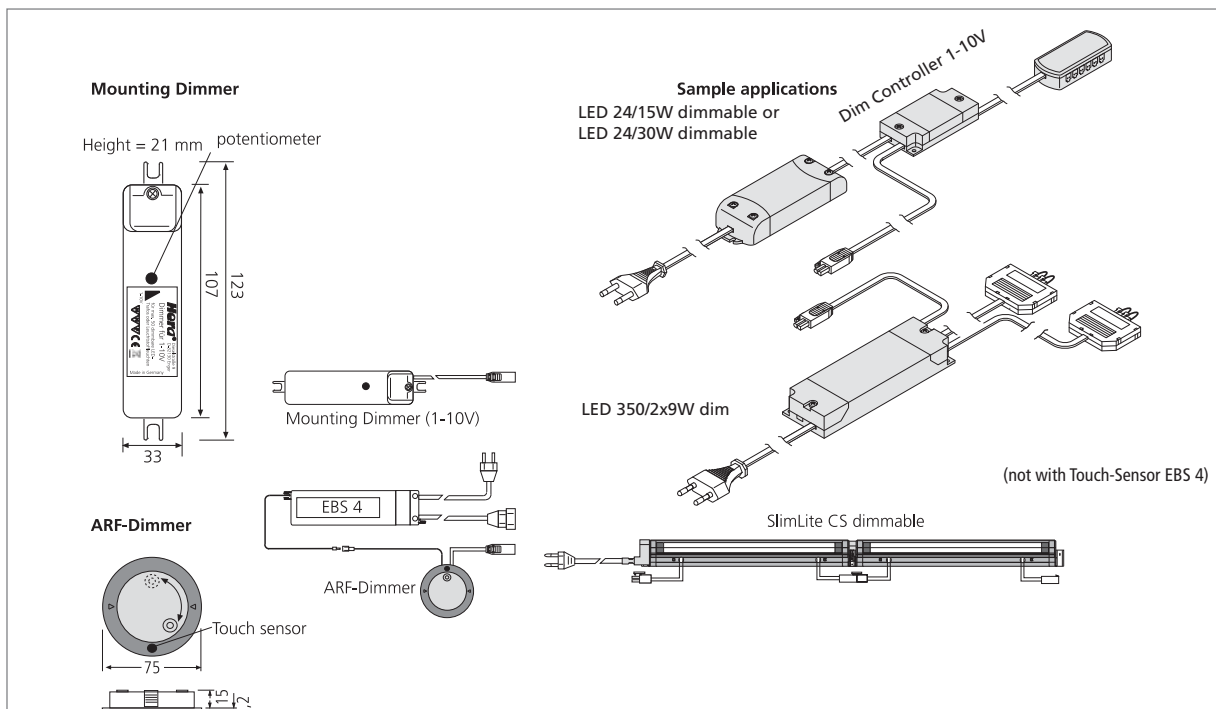

Article No.	Description	Features	Approx. weight
506 180 401 01	Mounting dimmer switch (1-10V)	• dim control cable 2m with Mini AMP-socket	95 g
506 180 501 06	ARF-Dimmer (1-10V) matt chrome	• dim control cable 2m with Mini AMP-socket	145 g
506 180 501 08	ARF-Dimmer (1-10V) stainless steel	• incl. sensor cable 2m to connect to EBS switch	145 g
506 110 301 02	EBS-4 D without sensor cable	• 1m Euro plug / 0.3m Euro coupling • optional, for use with the ARF dimmer switching function (not for use with SlimLite CS) • further information on page 135	125 g
205 020 108 12	Spacer ring (K105) matt chrome	• reduces the recess depth to 12mm	4 g
205 020 108 08	Spacer ring (K105) stainless steel		4 g
515 000 370 06	Mounting ring (K106) matt chrome	• incl. fastening screws	14 g
515 000 370 08	Mounting ring (K106) stainless steel		14 g
216 020 300 06	Mini AMP 2-way distributor	• to connect several transformers to one dimmer • further information on page 130	5 g
215 080 604 02	Mini AMP 6-way distributor		30 g