

LED 24/30W




LED Transformers
Halogen Transformers
Plug-in Systems
Switches/Dimmer/Sockets
Lamps



Electronic safety isolating transformer for 24V DC LED to 30W

- Connection: 220 – 240V / 0 – 50/60Hz
- Output: 1 – 30W
- constant 24V DC
- protected against short-circuit , overload and no-load
- max. length of secondary cables: **5m** each
- radio telecontrol to dim and switch (reach ca. 15m) with wall mounting
- up to 10 radio controllers can be activated simultaneously using a remote control
- with Memory-Function (after cut off from mains the last dimming status is recovered)

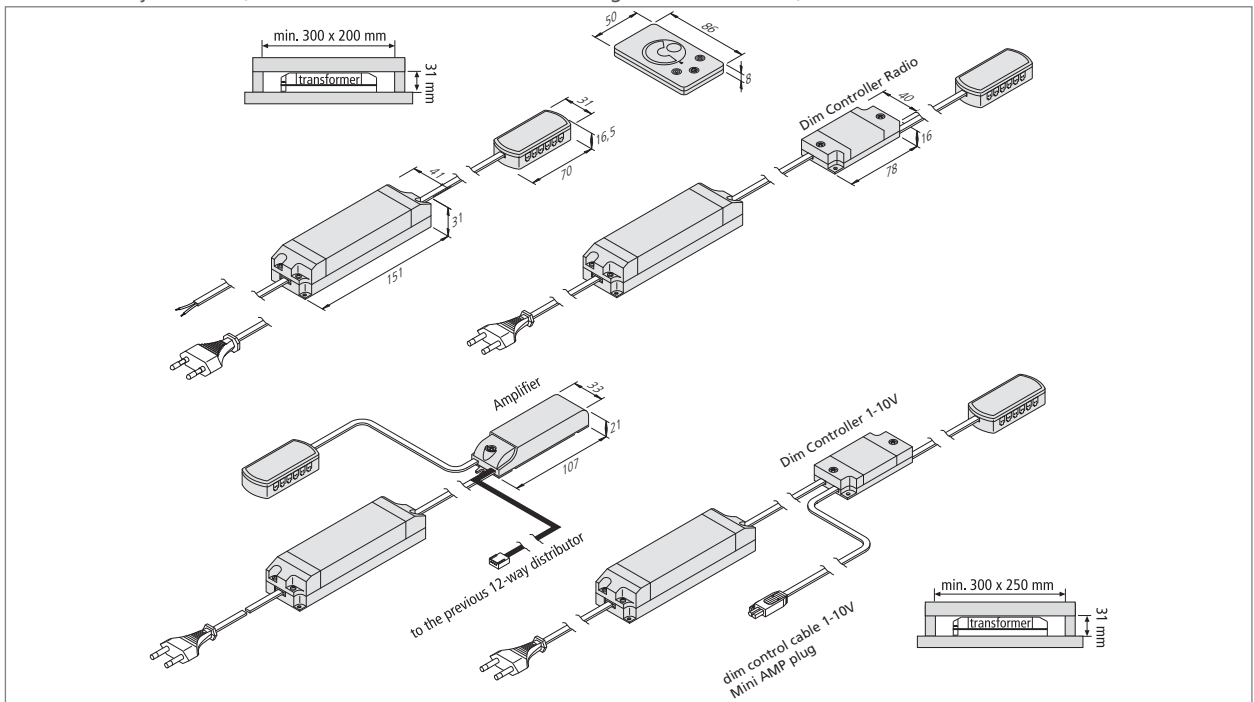

Article No.	Description	Features	Approx. weight
615 003 008 03	Transformer LED 24/30W DC 24V with 12-way distributor AE	• Mains cable 2m with ferrules	240 g
206 040 012 01	Transformer LED 24/30W DC 24V with 12-way distributor Euro	• Mains cable 2m with Euro plug	250 g
615 003 008 06	Transformer LED 24/30W DC 24V with 12-way distributor Euro dimmable (radio controller)	• Mains cable 2m with Euro plug • incl. radio telecontrol to dim and switch	325 g
206 040 012 05	Transformer LED 24/30W DC 24V with 12-way distributor Euro dimmable (radio controller)	• Mains cable 2m with Euro plug • without radio telecontrol as extension	275 g
615 003 008 05	Transformer LED 24/30W DC 24V with 12-way distributor Euro dimmable (radio controller) + amplifier	• Mains cable 2m with Euro plug • incl. connecting cable 2,5m to the previous 12-way distributor	405 g
615 003 008 02	Transformer LED 24/30W DC 24V with 12-way distributor Euro dimmable (1-10V)	• Mains cable 2m with Euro plug • dim control cable 0,3m with Mini AMP-plug	285 g
506 180 401 01	Mounting dimmer switch (1-10V)	• dim control cable 2m with Mini AMP-socket • further dimmer switch on page 138	95 g

NEW