


LED Twin-Stick 2




Small, twin plug-in LED stick without dark zones

- Application:** surface-mounted luminaire for furniture and showcases containing heat-sensitive products
- Connection:** LED-transformer DC 24V
- Lamp:** extremely long-life 70 mW LED, \varnothing life 30,000 hours
- Energy efficiency:** good, ww: 45lm/W; cw: 50lm/W
- Colour rendering:** good, ww: Ra = 90; cw: Ra = 80
- Special features:** no UV rays; maximum 36W or 2,4m in a light strip; without dark zones; LED Stick with side-connection for continues strip lighting

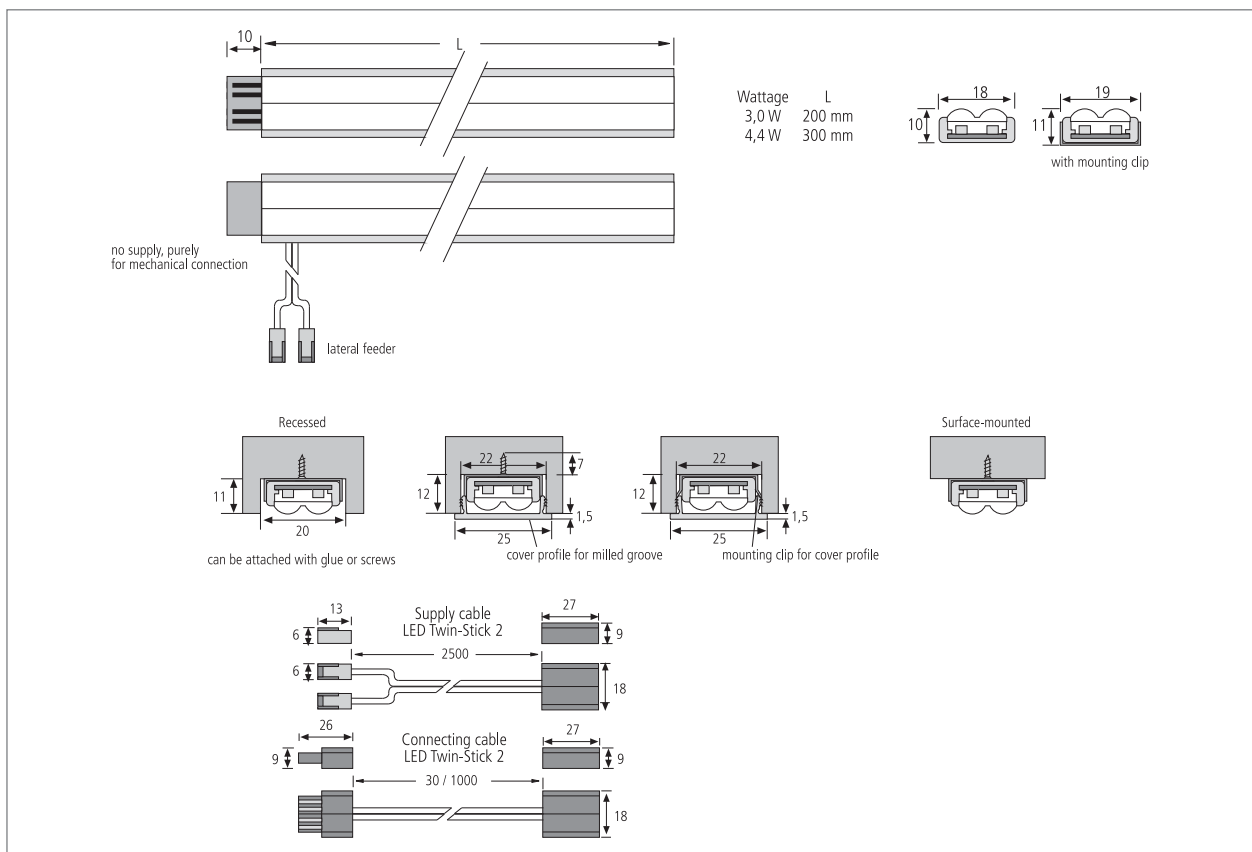

LED Twin-Stick 2

Fluorescent
LED



LED Twin-Stick 2 – the latest LED technology for general diffused lighting. Surface-mounted on furniture, displays, show-cases and cupboards. Illuminates without heating, ideal for delicate products. Available in various lengths, each in „cool white“ and „warm white“.



Article No.	Description	Illustration	Features	Approx. weight
202 021 232 01	LED Twin-Stick 2 200mm 48 LED 3,0W cw		• colour appearance cw (cool white)	45 g
202 021 233 01	LED Twin-Stick 2 300mm 72 LED 4,4W cw			68 g
202 021 233 11	LED Twin-Stick 2 300mm 72 LED 4,4W cw SE 2,5m		• incl. lateral feeder 2,5m	45 g
202 021 232 02	LED Twin-Stick 2 200mm 48 LED 3,0W ww		• colour appearance ww (warm white)	68 g
202 021 233 02	LED Twin-Stick 2 300mm 72 LED 4,4W ww			40 g
202 021 233 12	LED Twin-Stick 2 300mm 72 LED 4,4W ww SE 2,5m		• incl. lateral feeder 2,5m	2 g
215 272 625 02	Supply cable LED Twin-Stick 2 2500mm		• connection between transformer and first Stick	2 g
215 270 600 22	Connecting cable LED Twin-Stick 2 30 mm		• connection between two Twin-Sticks	5 g
215 270 610 12	Connecting cable LED Twin-Stick 2 1000 mm			21 g
202 040 107 04	Mounting clip LED Twin-Stick 2		• included with Stick • incl. 2 crews and 2 adhesive strips	4 g
203 012 801 10	Cover profile LED Stick 1000mm		• to cover the milled groove • material PC slightly matt	47 g
203 012 801 54	Cover profile LED Stick 5400mm roll			255 g
202 040 107 14	Mounting clip LED Twin-Stick 2 for cover profile		• set of 2 for groove with cover profile	2 g
206 040 011 01	Transformer LED 24/15W DC 24V		• mains cable 2m or 1,8m (60W) with Euro plug • with 12-way distributor	167 g
206 040 012 01	Transformer LED 24/30W DC 24V			250 g
615 003 006 02	Transformer LED 24/60W DC 24V			355 g
206 040 011 03	Transformer LED 24/15W DC 24V dimmable (radio controller)		• mains cable 2m with Euro plug • incl. remote controller to dim or switch	240 g
206 040 012 03	Transformer LED 24/30W DC 24V dimmable (radio controller)			325 g
615 003 007 02	Transformer LED 24/15W DC 24V dimmable (1-10V)		• mains cable 2m with Euro plug • dimmable (1-10V) • dimmer cable 0,3m with Mini AMP-plug	200 g
615 003 008 02	Transformer LED 24/30W DC 24V dimmable (1-10V)			285 g
506 180 401 01	Mounting dimmer switch (1-10V)		• dimmer cable 2m with Mini AMP-socket	95 g